


FlexTrack




A Versatile And Easy To Install Power Track System For Retail Shelves, Gondolas And POP Displays

It doesn't get any easier than with FlexTrack. The extremely small, effortless to install and versatile power track system allows you to easily incorporate electricity into your displays. The track sections can be cut to size with a hacksaw or shears, receptacles can be placed anywhere on the track for total flexibility.

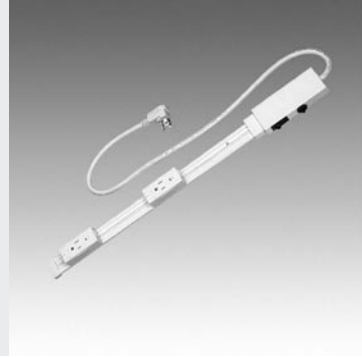

Product-Features

- Track sections available in 3' and 5' length. Can be easily cut to any size.
- Receptacles can be added or relocated anywhere on the track
- The system is so small and compact it virtually disappears in your displays
- Copper wires are securely embedded in track section so that they cannot be touched
- Available in white
- Can be used in 15 A and 20 A circuits
- UL listed

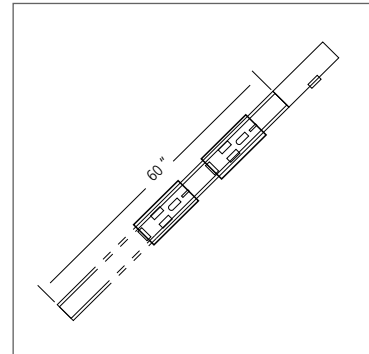

FlexTrack

System Components

① Corded Starter with Track

- 3' cord plugs into existing electrical outlet
- Total length: 5 ft.
- Lighted ON/OFF switch
- T5A circuit breaker
- Incl. 3 standard receptacles
- 3 outlets per receptacle (1 grounded, 2 polarized)

Order No. Description
ES444W Corded, White

Materials

Track & Cover: flame retardant rigid, vinyl compound

Rating

15A, 125V, 1875W

② KO Feeder Starter

- Hardwire for surface mount electrical boxes or conduit connector

Order No. Description
ES430W KO Feeder, White

Rating

20A, 125V, 2500W

③ Track Section

- Available in 3', 5' sections
- Easy to cut with hacksaw or shears
- Snap on removable track cover (sold separately)

Ordering Information

Item No.	Description
ES103W	3 ft. White
ES105W	5 ft. White

Track Cover

- Available in 5' sections
- Snaps onto track
- Easy to cut with hacksaw or shears

Ordering Information

Item No.	Description
ES105LW	5 ft. Trac Cover, White

④ End Cap

Shields embedded wires at open end of final track section

Order No. Description
ES900W End Cap, White

⑤ 15 A Standard Receptacle

- Snaps anywhere along track
- Can be repositioned
- 3 outlets per receptacle (1 grounded, 2 polarized)

Order No. Description
ES200W Standard, White

Rating

15A, 125 V, 187 SW
(NEMA5 15R configuration)

⑥ Captive Receptacle

- Slides anywhere along track
- Can be repositioned
- 3 outlets per receptacle (1 grounded, 2 polarized)
- Unique tamper-resistance design (20 A only)

Order No. Description
ES210W 15 A, Captive, White
ES220W 20 A, Captive, White

Rating

15 / 20A, 125 V, 2500SW
(NEMA5 20R configuration)

⑦ Flexible & Straight Connector

Allows the track to bridge up to a 2.5 diameter pipe, conduit or other obstacle

Order No. Description
ES510W Straight Connector, White
ES580W Flexible Connector, White
14-1/4" L x 1-5/8" H x 5/8" D

