

SlimLite XL T5






For longer runs our new SlimLite XL is the solution. The XL offers all the benefits of SlimLite: It's cooler, brighter, more compact. And now it's available in 1', 2', 3', 4' and 5' lengths. This enables continuous rows of light of up to 50 linear feet which makes the XL the perfect lighting system for gondolas, store fixtures and long runs of shelves. SlimLite XL features standard T-5 lamps which are available in a variety of light colors. Its optional plexiglas cover makes it the preferred light fixture for food applications.



Product-Features

- Built-in electronic ballast
- Energy efficient, only 8, 14, 21, 28 and 35 W
- Uses standard T-5 lamps, CRI > 82 (to be ordered separately)
- Plug-in modular system permits easy connection for continuous lighting
- Extremely long bulb life, rated 20,000 hrs.
- Available in five different lengths:
1' (12 ⁷/₈"), 2' (23 ¹/₈"), 3' (34 ⁷/₈"),
4' (46 ³/₄") and 5' (58 ⁷/₁₆") width: 29 ¹/₃₂" , height: 1 ⁷/₁₆"
- Optional plexiglass cover available (to be ordered separately)
- Contemporary white housing
- End of lamp life circuitry to protect ballast

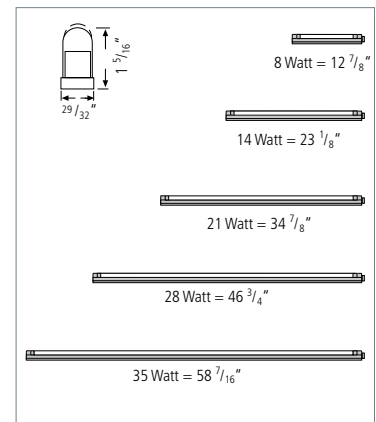

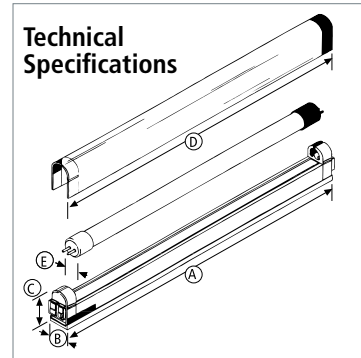

What you'll need to buy

SlimLite XL Fluorescent Light Fixture

| Description | Watt | Length | Code No. |
|-------------|------|-----------------------------------|----------|
| ES12 | 8 | 12 ⁷ / ₈ " | ES12 |
| ES22 | 14 | 23 ¹ / ₈ " | ES22 |
| ES34 | 21 | 34 ⁷ / ₈ " | ES34 |
| ES46 | 28 | 46 ³ / ₄ " | ES46 |
| ES59 | 35 | 58 ⁷ / ₁₆ " | ES59 |

Also available with bulb and cover. Add BC (Cool White) or WW BC (Warm White) to product code.

Accessories

| | Description | Code No. |
|--|-------------------------------|----------|
| Power Cord, Connecting Cables, Hardwire Box, Direct Connector and Switch | same as SlimLite, see page 41 | |
| Replacement Bulb | 8W Cool White | SFB8 |
| | 8W Warm White | SFB8WW |
| | 14W Cool White | SFB14 |
| | 14W Warm White | SFB14WW |
| | 21W Cool White | SFB21 |
| | 21W Warm White | SFB21WW |
| | 28W Cool White | SFB28 |
| | 28W Warm White | SFB28WW |
| | 35W Cool White | SFB35 |
| | 35W Warm White | SFB35WW |
| Plexiglas Cover | for ES12 | SPLEX12 |
| | for ES22 | SPLEX22 |
| | for ES34 | SPLEX34 |
| | for ES46 | SPLEX46 |
| | for ES59 | SPLEX59 |

| | ES12 | ES22 | ES34 | ES46 | ES59 |
|----------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|------------------------------------|
| (A) fixture length | 12 ⁷ / ₈ " | 23 ¹ / ₈ " | 34 ⁷ / ₈ " | 46 ³ / ₄ " | 58 ⁷ / ₁₆ " |
| (B) fixture width | 29 ¹ / ₃₂ " | 29 ¹ / ₃₂ " | 29 ¹ / ₃₂ " | 29 ¹ / ₃₂ " | 29 ¹ / ₃₂ " |
| (C) fixture height with diffuser | 1 ⁵ / ₁₆ " | 1 ⁵ / ₁₆ " | 1 ⁵ / ₁₆ " | 1 ⁵ / ₁₆ " | 1 ⁵ / ₁₆ " |
| (D) tube length | 11 ¹ / ₄ " | 21 ¹ / ₂ " | 33 ¹ / ₄ " | 45 ¹ / ₈ " | 57" |
| (E) tube diameter | T5 (⁵ / ₈ " | T5 (⁵ / ₈ " | T5 (⁵ / ₈ " | T5 (⁵ / ₈ " | T5 (⁵ / ₈ " |
| watts | 8 | 14 | 21 | 28 | 35 |
| lumens | 400 | 1350 | 2100 | 2900 | 3650 |
| current | 136 mA | 136 mA | 198 mA | 253 mA | 315 mA |
| in-rush current | less than 5 AMP | | | | |
| CRI | > 82 | > 82 | > 82 | > 82 | > 82 |
| voltage | AC 120 | AC 120 | AC 120 | AC 120 | AC 120 |
| frequency | 60 Hz | 60 Hz | 60 Hz | 60 Hz | 60 Hz |
| maximum watts in line | 585 Watts | 585 Watts | 585 Watts | 585 Watts | 585 Watts |