



## Product Description

### Curve-LED- As versatile as your imagination

Curve-LED is a fully encapsulated, flexible LED strip that provides smooth, even illumination in the most unique applications. Planar light for easy installation into 11/64" wide by 5/16" deep milled grooves.

## Product Features

- Available color temperatures:
  - 3000 K
  - 4000 K
  - 5000 K
  - Additional color temperatures (special order)
- Available in 196" (5m) rolls
- Optional: Special order pre-cut lengths with soldered power cord
- To be used with 24 Vdc Constant Voltage Driver
- Interconnect up to 48 W in one run
- Individual runs, including cables not to exceed 32 <sup>2/5</sup>"
- 50,000 hours usable life
- Excellent CRI >90
- Efficacy >20 lm/W
- IP66 rated
- Cut Length = 2"
- 3.4 W/ft
- Bending radius 1"

## Product Details





Available Options

Necessary Accessories on Page 39


MODEL	LENGTH	POWER	LIGHT OUTPUT	EFFICACY	CRI	PART NO. (3000 K)	PART NO. (5000 K)
Curve-LED	196" (5m) roll	3.4 W/ft	66 lm/ft	20 lm/W	>90	TAPE/CV07/196/3000	TAPE/CV07/196/5000
Curve-LED	2" - 194"*	3.4 W/ft	66 lm/ft	20 lm/W	>90	TAPE/CV07/**/3000	TAPE/CV07/**/5000

\*Custom length

\*\*Use configurator to identify completed part number

Compatible Drivers on Page 36

Dimensions

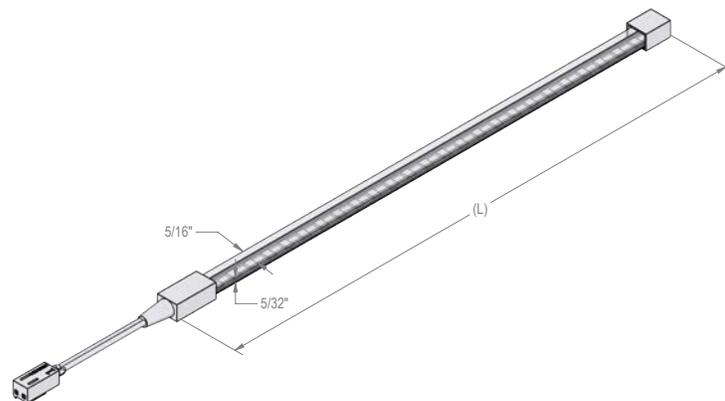

# Low Voltage Drivers

## Constant Voltage Drivers

### 24 Vdc Drivers



**Daisy Driver, 30W**  
(Full Specs on Page #94)



**Daisy Driver, 75W**  
(Full Specs on Page #95)



**Daisy Driver, 96W**  
(Full Specs on Page #96)



**Driver, 6W**  
(Full Specs on Page #98)



**Driver, 30W**  
(Full Specs on Page #99)



**Driver, 75W**  
(Full Specs on Page #100)



**Driver, 96W**  
(Full Specs on Page #101)

# Compatibility

## Constant Voltage Compatible LEDs

**LINEAR**

---

- ThinStick-LED
- CStick-LED
- TapeEven-LED
- Curve-LED
- TapeUltra-LED
- TapeBasic-LED
- Stick3-LED
- Stick2-LED
- StickVE-LED

# Low Voltage Accessories

## TapeEven-LED

### Power Cords

FINISH	LENGTH	PART NO.
White	3"*	TAPE/B/PC3/ST
White	12"	TAPE/B/PC12/ST
White	36"	TAPE/B/PC36/ST
White	79"	TAPE/B/PC79/ST
White	144"	TAPE/B/PC144/ST
Black	3"*	TAPE/B/PC3/ST/BL
Black	12"	TAPE/B/PC12/ST/BL
Black	36"	TAPE/B/PC36/ST/BL
Black	79"	TAPE/B/PC79/ST/BL
Black	144"	TAPE/B/PC144/ST/BL

### Connecting Cables

FINISH	LENGTH	PART NO.
White	3"*	TAPE/B/CC03/ST
White	6"	TAPE/B/CC06/ST
White	12"	TAPE/B/CC12/ST

### Optional Accessories

ACCESSORIES	PART NO.
Dimming Module	STICKPSDIM/S
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power Cord locking clip	CLIP/24V/CCPC

## Curve-LED

### Optional Accessories

DESCRIPTION	PART NO.
Dimming Module	STICKPSDIM/S
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power Cord locking clip	CLIP/24V/CCPC