
Daisy Driver, 75W



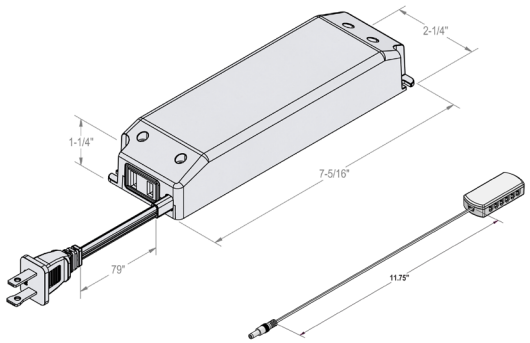

Part No. PS24V/75/Y/D
Terminal Block Part No. PS24V/TB/DC/Y

Product Details

Product Description

24 Vdc Electronic Daisy Driver

Constant voltage electronic driver for up to 75 W of LEDs. Now with an integrated connector to allow for easy daisy-chaining. Interconnect up to a max of 8 drivers.

Product Features

- Input: 100 – 120 VAC, 50/60 HZ, 1.0 A
- Output: 24 Vdc, 3.125 A max. SELV/UL8750 Class 2, CAN/CSA C22.2 No. 250.13-14
- Load: 6 – 75 W, 24 Vdc LED
- Power Factor: ≥0.9 λ
- Ambient operating temperature: -20° C ~ 45° C
- Non-dimmable input, output dimming accessories are available
- Open circuit, short circuit, overload, and over-temperature protection
- Auto restart after fault removal
- 5.5 mm x 2.1 mm barrel jack socket on output housing
- Additional output cables, splitters, and terminal blocks are available
- 79" plug-in 2-pin power cord
- 2-Pin convenience outlet in the housing allows connection of additional 2-pin drivers
- Up to 8 drivers maximum interconnected
- Terminal Block sold separately

c UL us LISTED

Design and technical specifications may change without advance notice. Information is accurate at the time of publication.