

HO-LED2



Product Description

High Output Swivel LED Spotlight

HO-LED2 spotlights are ideal for applications where high levels of directional LED light are desired. HO-LED2 features 3 x high power, full optic LEDs. HO-LED2 is perfect for large display cases, soffits, and furniture.

Product Features

- Available color temperatures:
 - 3000 K
 - 5700 K
 - Additional color temperatures (special order)
- Attached 79" connecting cable with a plug-in connector
- Swivel (+/- 20 degrees)
- Approved for use in closet applications
- Dimmable with available accessories
- High quality, Brushed Aluminum housing
- To be used with 350 mA Constant Current Driver
- 50,000 hrs. usable life
- Warm White CRI >90, Cool White CRI >72
- Efficacy: Warm White 112 lm/W, Cool White 91 lm/W
- Energy-efficient: uses only 3.6 W
- Recess depth 1 1/8" non-swivel, 1 1/16" swivel

Product Details






Available Options

Necessary Accessories on Page 67

MODEL	DIAMETER	POWER	LIGHT OUTPUT	EFFICACY	CRI	FINISH	PART NO. (3000 K)	PART NO. (5700 K)
HO-LED2 Swivel	3 1/8"	3.6 W	343 Lm	112 lm/W	>72	Brushed Aluminum	HO-LED2/WW	HO-LED2

Compatible Drivers on Page 64

Dimensions

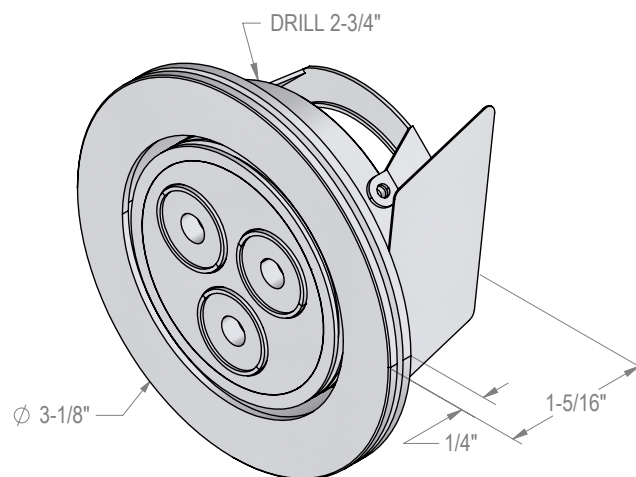

Non Swivel

HO-LED2

Connecting Cables

DESCRIPTION	LENGTH	PART NO.
350mA Power Cable Extension, Black	36"	LEDCC36
350mA Power Cable Extension, Black	72"	LEDCC72
350mA Terminal Block, 3 way	98"	TBLED/B

Optional Accessories

DESCRIPTION	PART NO.
Dimming Controller	DIMCONTROL/EURO
Y-Cable Adapter	STICKDIM/YCABLE

FR68-LED

Connecting Cables

DESCRIPTION	LENGTH	PART NO.
Power Cable Extension, White	39"	KB12LEDCC39/H
Power Cable Extension, White	84"	KB12LEDCC84/H
Power Cable Extension, White	98"	KB12LEDCC98/H
Power Cable Extension, Black	39"	KB12LEDCC39/BL/H
Power Cable Extension, Black	39"	KB12LEDCC98/BL/H
Power Cable Extension, Black	39"	KB12LEDCC120/BL/H
Terminal Block	39"	PS24V/TB
Terminal Block, DC plug	39"	PS24V/TB/DC/Y
Power Cord locking clip		CLIP/24V/CCPC

Optional Accessories

DESCRIPTION	PART NO.
Dimming Module	PS24V/DIM/EURO
Dimming Controller	DIMCONTROL/EURO
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Surface Mount Ring, Stainless Steel	DIR68/SS
Surface Mount Ring, Matte Chrome	DIR68/MC

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #114)



Daisy Driver, 75W
(Full Specs on Page #115)



Daisy Driver, 96W
(Full Specs on Page #116)



Driver, 6W
(Full Specs on Page #117)

Constant Current Drivers

LED Drivers



LED Driver, 10W
(Full Specs on Page #118)



LED Driver, 18W Dimmable
(Full Specs on Page #119)

Compatibility

Constant Voltage Compatible LEDs

SPOT

SR45-LED

FR68-LED

Eco78-LED

R55-LED

ER-LED

SR68-LED CV

Constant Current Compatible LEDs

SPOT

SR68-LED

HO-LED2

Eye-LED