
TapeBasic-LED

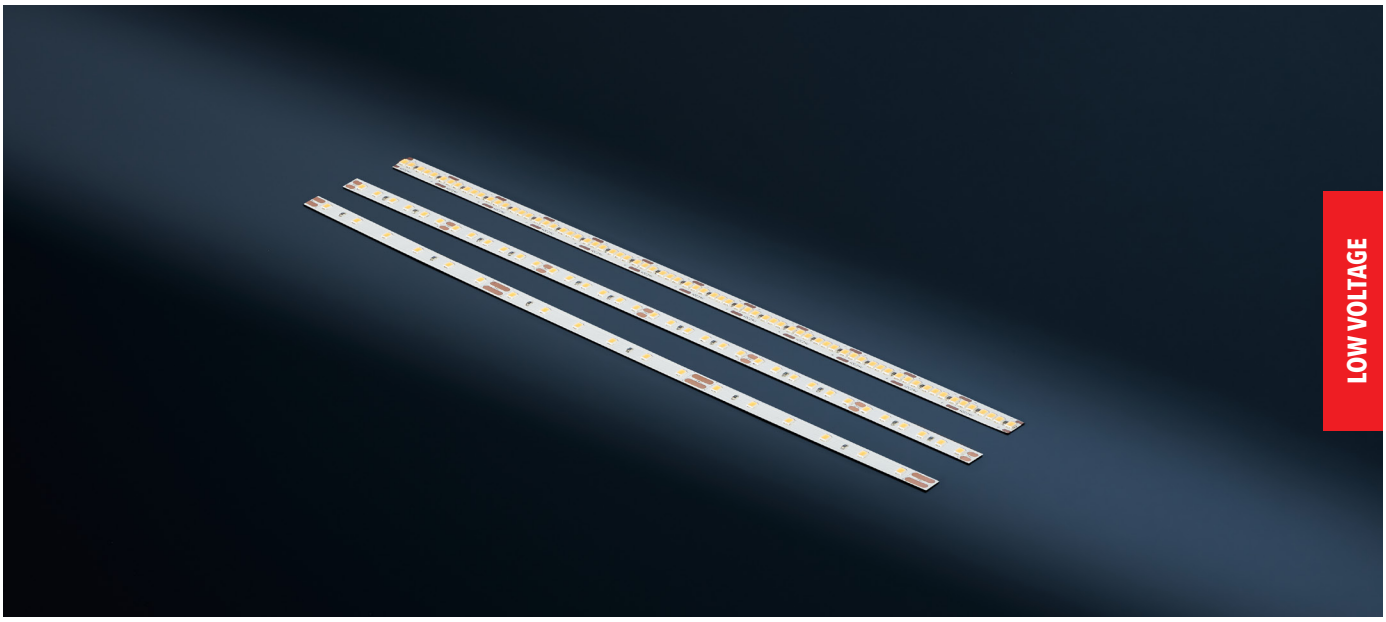

Product Description

Customizable LED Lights at an Affordable Price

TapeBasic-LED is flexible, efficient and a cost-effective introduction into LED tape. Fully customizable and available in many color temperatures.

Product Features

- Available color temperatures:
  - 2700 K
  - 3000 K
  - 4000 K
  - 5000 K
  - 6500 K
- Available options:
  - 300 – 1.2 W/ft, 90 lm/W
  - 600 – 2.4 W/ft, 90 lm/W
  - 1200 – 4.8 W/ft, 90 lm/W
  - 700 – 4.2 W/ft, 113 lm/W
- Optional: Special order pre-cut lengths with soldered power cord
- Can be ordered pre-assembled with extrusion and frosted lens
- Self-adhering, flexible LED strip
- Stocked in 196" (5m) rolls
- Finish: white tape with exposed LEDs
- To be used with 24 Vdc Constant Voltage Driver
- 35,000 hours usable life
- Good CRI >80
- Dimmable












Compatible Drivers on Page 38

Necessary Accessories on Page 42


TapeBasic-LED 300 (196" Roll)		KELVIN	PART NO
POWER	1.2 W/ft	2700	TAPE/B3/196/2700
LIGHT OUTPUT	108 lm/ft	3000	TAPE/B3/196/3000
EFFICACY	90 lm/W	3500	TAPE/B3/196/3500
CRI	>80	4000	TAPE/B3/196/4000
MAX CONNECTED	32.8' or 48 W	5000	TAPE/B3/196/5000
		6500	TAPE/B3/196/6500






TapeBasic-LED 600 (196" Roll)		KELVIN	PART NO
POWER	2.4 W/ft	2700	TAPE/B3/196/2700
LIGHT OUTPUT	216 lm/ft	3000	TAPE/B3/196/3000
EFFICACY	90 lm/W	3500	TAPE/B3/196/3500
CRI	>80	4000	TAPE/B3/196/4000
MAX CONNECTED	14.9' or 48 W	5000	TAPE/B3/196/5000
		6500	TAPE/B3/196/6500





TapeBasic-LED 1200 (196" Roll)		KELVIN	PART NO
POWER	4.8 W/ft	2700	TAPE/B3/196/2700
LIGHT OUTPUT	432 lm/ft	3000	TAPE/B3/196/3000
EFFICACY	90 lm/W	3500	TAPE/B3/196/3500
CRI	>80	4000	TAPE/B3/196/4000
MAX CONNECTED	7.3' or 48 W	5000	TAPE/B3/196/5000
		6500	TAPE/B3/196/6500





Low Voltage Accessories

TapeBasic-LED / TapeUltra-LED

Power Cords

FINISH	LENGTH	PART NO.
White	3"	TAPE/B/PC3/ST
White	12"	TAPE/B/PC12/ST
White	36"	TAPE/B/PC36/ST
White	79"	TAPE/B/PC79/ST
White	144"	TAPE/B/PC144/ST
Black	3"	TAPE/B/PC3/ST/BL
Black	12"	TAPE/B/PC12/ST/BL
Black	36"	TAPE/B/PC36/ST/BL
Black	79"	TAPE/B/PC79/ST/BL
Black	144"	TAPE/B/PC144/ST/BL

Connecting Cables

FINISH	LENGTH	PART NO.
White	2", Quick connect	TAPE/B/CC2/N8
White	6", Quick connect	TAPE/B/CC6/N8
White	12", Quick connect	TAPE/B/CC12/N8
White	3", soldered*	TAPE/B/CC03/ST
White	6", soldered	TAPE/B/CC06/ST
White	12", soldered	TAPE/B/CC12/ST

Optional Accessories

ACCESSORIES	PART NO.
Dimming Module	PS24V/DIM/EURO
Dimming Controller	DIMCONTROL/EURO
Y-Cable adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/Y
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power cord locking clip	CLIP/24V/CCPC
Cover profile, frosted, 39"	STICK2/CP/39

TapeBasic-LED / TapeUltra-LED continued

Housing Kit Options

DESCRIPTION	LENGTH	PART NO.
"U" channel, X1	78"	TAPE/B/EXT1/78
45 Degree channel, X4	78"	TAPE/B/EXT4/78
Winged "U" channel, X6	78"	TAPE/B/EXT6/78
NSF "U" channel, X7	78"	TAPE/B/EXT7/78
Narrow "U" channel, X8	78"	TAPE/B//EXT8/78
Frosted Lens	78"	TAPE/B/EXTx/LF/78
Clear Lens	78"	TAPE/B/EXTx/LC/78
Mounting Clips with screws		TAPE/B/EXTx/MC
Magnetic Mounting clips		TAPE/B/EXTx/MC/M
Magnetic Tape		TAPE/B/EXTx/MT
End Caps		TAPE/B/EXTx/ECB
End Caps with hole for PC		TAPE/B/EXTx/ECH

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #114)



Daisy Driver, 75W
(Full Specs on Page #115)



Daisy Driver, 96W
(Full Specs on Page #116)



Driver, 6W
(Full Specs on Page #117)

Compatibility

Constant Voltage Compatible LEDs

LINEAR
ThinStick-LED
ThinStick-LED HOT
FreeCut-LED
CStick-LED
TapeBasic-LED
TapeUltra-LED
TapeEven-LED
Tape90°-LED
TapeSideView-LED
Curve-LED
Neon-LED

Design and technical specifications may change without advance notice. Information is accurate at the time of publication.