

TapeEven-LED

NEW



Product Description

COB Tape – even light output without a lens

The flexibility of TapeEven-LED makes it optimal for projects with unique design and budget requirements. TapeEven-LED provides continuous and even light output without a lens, making it a simpler and more cost-effective solution.

Product Features

- Available color temperatures:
 - 3000 K
 - 4000 K
 - Additional color temperatures (special order)
- Optional: Special order pre-cut lengths with soldered power cord
- Self-adhering, flexible LED strip
- Stocked in 196" (5m) rolls
- To be used with 24 Vdc Constant Voltage Driver
- Interconnect up to 48 W in one run
- Individual runs, including cables not to exceed 70' ^{7/10"}
- 50,000 hours usable life
- Excellent CRI >90
- Efficacy >87 lm/W
- IP20 rated
- Cut Length = 2.5"
- PCB Width = 5/16"
- 3.44 W/ft





Available Options

Necessary Accessories on Page 39


MODEL	LENGTH	POWER	LIGHT OUTPUT	EFFICACY	CRI	PART NO. (3000 K)	PART NO. (4000 K)
TapeEven-LED	196" (5m) roll	3.44 W/ft	295 lm/ft	87 lm/W	>90	TAPE/TE25/196/3000	TAPE/TE25/196/4000
TapeEven-LED	2.5" - 194"*	3.44 W/ft	295 lm/ft	87 lm/W	>90	TAPE/TE25/**/3000	TAPE/TE25/**/4000

*Custom length

**Use configurator to identify completed part number

Compatible Drivers on Page 36

Dimensions

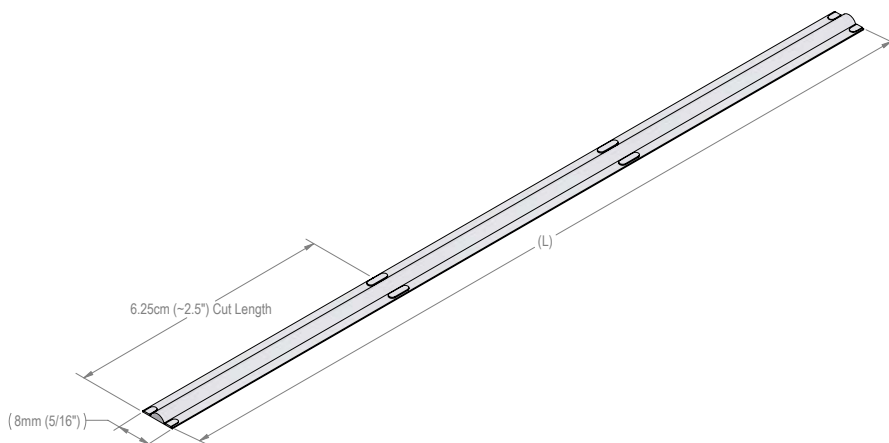

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #94)



Daisy Driver, 75W
(Full Specs on Page #95)



Daisy Driver, 96W
(Full Specs on Page #96)



Driver, 6W
(Full Specs on Page #98)



Driver, 30W
(Full Specs on Page #99)



Driver, 75W
(Full Specs on Page #100)



Driver, 96W
(Full Specs on Page #101)

Compatibility

Constant Voltage Compatible LEDs

LINEAR

ThinStick-LED

CStick-LED

TapeEven-LED

Curve-LED

TapeUltra-LED

TapeBasic-LED

Stick3-LED

Stick2-LED

StickVE-LED

Low Voltage Accessories

TapeEven-LED

Power Cords

FINISH	LENGTH	PART NO.
White	3"*	TAPE/B/PC3/ST
White	12"	TAPE/B/PC12/ST
White	36"	TAPE/B/PC36/ST
White	79"	TAPE/B/PC79/ST
White	144"	TAPE/B/PC144/ST
Black	3"*	TAPE/B/PC3/ST/BL
Black	12"	TAPE/B/PC12/ST/BL
Black	36"	TAPE/B/PC36/ST/BL
Black	79"	TAPE/B/PC79/ST/BL
Black	144"	TAPE/B/PC144/ST/BL

Connecting Cables

FINISH	LENGTH	PART NO.
White	3"*	TAPE/B/CC03/ST
White	6"	TAPE/B/CC06/ST
White	12"	TAPE/B/CC12/ST

Optional Accessories

ACCESSORIES	PART NO.
Dimming Module	STICKPSDIM/S
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power Cord locking clip	CLIP/24V/CCPC

Curve-LED

Optional Accessories

DESCRIPTION	PART NO.
Dimming Module	STICKPSDIM/S
Dimming Controller	DIMCONTROL/S
Y-Cable Adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH
Rocker Switch, DC plug	PS24V/SWITCH/DC
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/S
Terminal Block, DC, Black	PS24V/TB/DC/BL/S
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power Cord locking clip	CLIP/24V/CCPC