TapeEven-LED



Product Description

COB Tape – even light output without a lens

The flexibility of TapeEven-LED makes it optimal for projects with unique design and budget requirements. TapeEven-LED provides continuous and even light output without a lens, making it a simpler and more cost-effective solution.

Product Features —



- 3000 K
- 4000 K
- Additional color temperatures (special order)
- Optional: Special order pre-cut lengths with soldered power cord
- Self-adhering, flexible LED strip
- Stocked in 196" (5m) rolls
- To be used with 24 Vdc Constant Voltage Driver
- Interconnect up to 48 W in one run

- Individual runs, including cables not to exceed 70 3/4'
- 50,000 hours usable life
- Excellent CRI >90
- Efficacy >90 lm/W
- IP20 rated
- Cut Length = 2.5"
- PCB Width = 7/16"
- 3.44 W/ft
- Dimmable










Available Options

Necessary Accessories on Page 41

| MODEL | LENGTH | POWER | LIGHT OUTPUT | EFFICACY | CRI | PART NO. (3000 K) | PART NO. (4000 K) |
|--------------|----------------|-----------|-----------------|----------|-----|-----------------------------------|------------------------|
| TapeEven-LED | 196" (5m) roll | 3.44 W/ft | 329 lm/ft | 90 lm/W | >90 | TAPE/TE25/196/3000 | TAPE/TE25/196/4000 |
| TapeEven-LED | 2.5" - 194"* | 3.44 W/ft | 329 lm/ft | 90 lm/W | >90 | TAPE/TE25/**/3000 | TAPE/TE25/**/4000 |
| | *Custom length | | | | | **Use configurator to i number | dentify completed part |

— Compatible Drivers on Page 38

sions

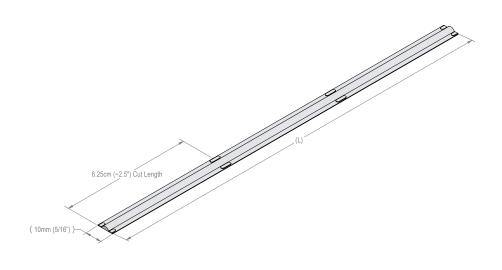

www.heralighting.com

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W (Full Specs on Page #94)



Daisy Driver, 75W (Full Specs on Page #95)



Daisy Driver, 96W (Full Specs on Page #96)



Driver, 6W (Full Specs on Page #98)

Compatibility

Constant Voltage Compatible LEDs

LINEAR

FreeCut-LED

ThinStick-LED

CStick-LED

TapeEven-LED

Curve-LED

TapeUltra-LED

TapeBasic-LED

Stick3-LED

Stick2-LED

StickVE-LED

www.heralighting.com 39

Low Voltage Accessories

CStick-LED

Housing Options

| ACCESSORIES | PART NO. |
|----------------------------|-------------------|
| "U" channel, 78" | EXT1 |
| 45 Degree channel, 78" | EXT4 |
| Winged "U" channel, 78" | EXT6 |
| NSF "U" channel. 78" | EXT7 |
| Narrow "U" channel, 78" | EXT8 |
| Frosted Lens, 78" | TAPE/B/EXTx/LF/78 |
| Clear Lens, 78" | TAPE/B/EXTx/LC/78 |
| Mounting Clips with screws | TAPE/B/EXTx/MC |
| Magnetic mounting clips | TAPE/B/EXTx/MC/M |
| Magnetic Tape | custom |

Optional Accessories

| DESCRIPTION | PART NO. |
|-------------------------|--------------------------|
| Dimming Module | STICKPSDIM/S |
| Dimming Controller | DIMCONTROL/EURO |
| Y-Cable adapter | STICKDIM/YCABLE |
| Remote Control Dimmer | RCPSDIM/V2 |
| Rocker Switch | PS24V/SWITCH/RS/H |
| Rocker Switch, DC plug | PS24V/SWITCH/RS/DC1224/H |
| Terminal Block | PS24V/TB |
| Terminal Block, DC plug | PS24V/TB/DC/Y |
| 24 V Occupancy Switch | PS24V/SW/OC |
| Sensor Switch | IRSWITCH/H |
| Sensor Switch, Dimmable | IRSWITCH/H/D |
| Power cord locking clip | CLIP/24V/CCPC |

TapeEven-LED

Power Cords

| FINISH | LENGTH | PART NO. |
|--------|--------|--------------------|
| White | 3″* | TAPE/B/PC3/ST |
| White | 12" | TAPE/B/PC12/ST |
| White | 36" | TAPE/B/PC36/ST |
| White | 79" | TAPE/B/PC79/ST |
| White | 144" | TAPE/B/PC144/ST |
| Black | 3"* | TAPE/B/PC3/ST/BL |
| Black | 12" | TAPE/B/PC12/ST/BL |
| Black | 36" | TAPE/B/PC36/ST/BL |
| Black | 79" | TAPE/B/PC79/ST/BL |
| Black | 144" | TAPE/B/PC144/ST/BL |

Connecting Cables

| FINISH | LENGTH | PART NO. |
|--------|--------|----------------|
| White | 3"* | TAPE/B/CC03/ST |
| White | 6" | TAPE/B/CC06/ST |
| White | 12" | TAPE/B/CC12/ST |

Optional Accessories

| ACCESSORIES | PART NO. |
|-------------------------|------------------------------|
| Dimming Module | STICKPSDIM/S |
| Dimming Controller | DIMCONTROL/EURO |
| Y-Cable adapter | STICKDIM/YCABLE |
| Remote Control Dimmer | RCPSDIM/V2 |
| Rocker Switch | PS24V/SWITCH/RS/H |
| Rocker Switch, DC plug | PS24V/SWITCH/RS/ DC1224/H |
| Terminal Block | PS24V/TB |
| Terminal Block, DC plug | PS24V/TB/DC/Y |
| 24 V Occupancy Switch | PS24V/SW/OC |
| Sensor Switch | IRSWITCH/H |
| Sensor Switch, Dimmable | IRSWITCH/H/D |
| Power cord locking clip | CLIP/24V/CCPC |

www.heralighting.com 41