
ThinStick-LED

NOW DIMMABLE

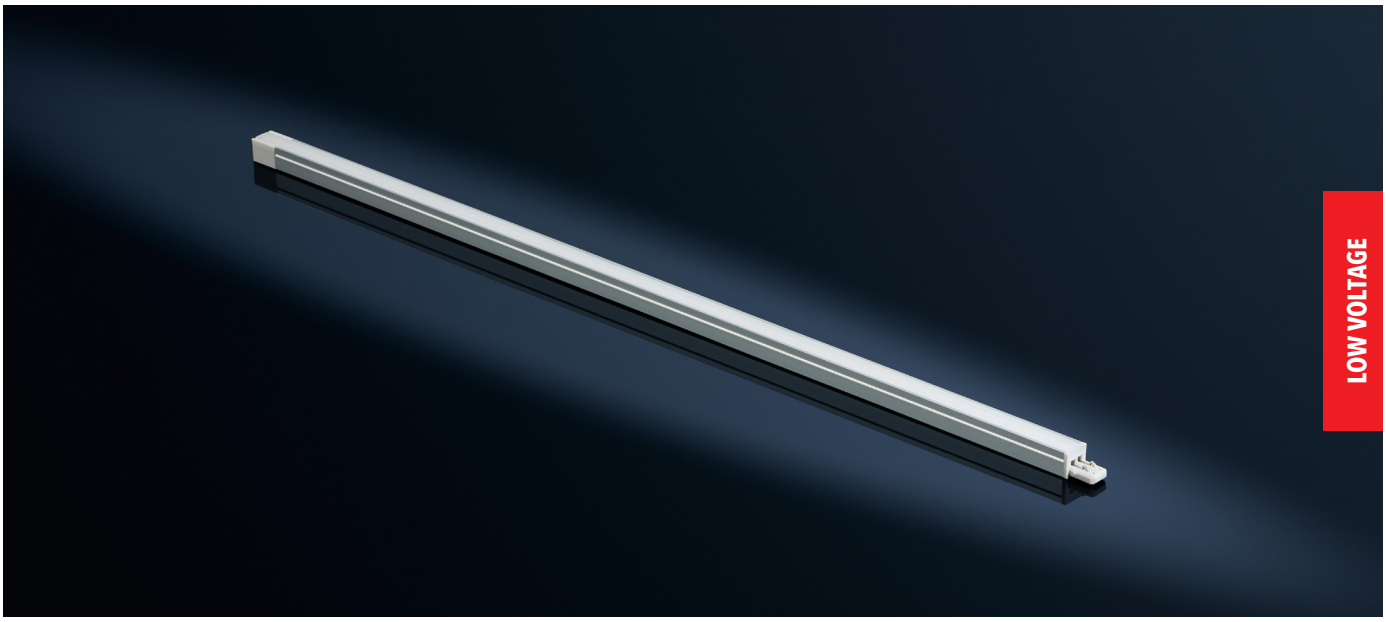

LOW VOLTAGE

Product Details

Product Description


The Next Evolution of the Stick-LED Family

ThinStick-LED is a miniature, modular, powerful linear LED stick. It delivers high output illumination without high energy costs, all in a slim, sleek aluminum extrusion that blends away. ThinStick-LED is the perfect solution when you want to shine the light on your products above all else.

Product Features

- Available sizes:
  - 8″ (2 W)
  - 12″ (3.4 W)
  - 24″ (7 W)
  - 34″ (9.6 W)
  - 46″ (13 W)
- Available color temperatures:
  - 3000 K
  - 3500 K
  - 4000 K
  - Additional color temperatures (special order)
- Built-in magnetic mounting
- Extremely small dimensions: 5/16″ H x 5/16″ W
- Interconnect up to 9.5 ft or 32 W to a single power cord
- Individual runs, including cables not to exceed 18′
- Linear LED with frosted lens
- Can be recessed (flush with board) or surface-mounted
- Extremely high, even light output
- Comes with screw-in mounting clips
- To be used with 24 Vdc Constant Voltage Driver
- EPH certified to NSF/ANSI 2 for use in food zones
- 50,000 hours usable life
- Excellent CRI >94
- Efficacy >93-95 lm/W
- Dimmable with available accessories



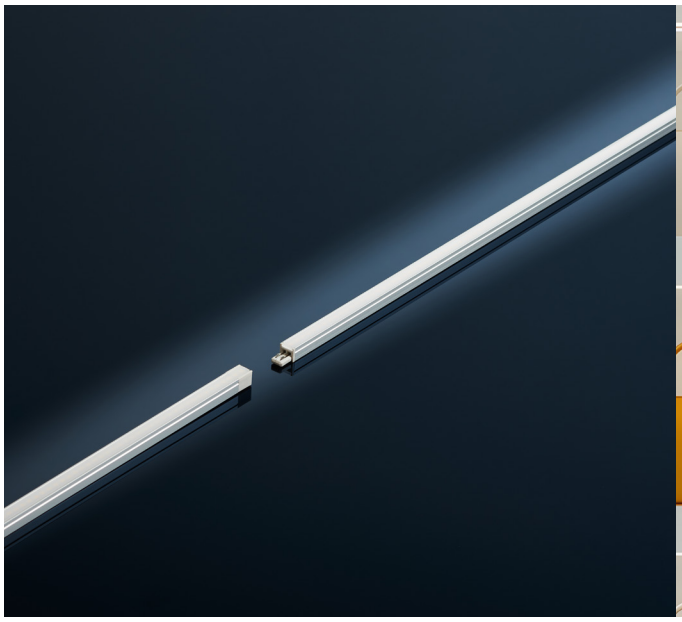




Available Options

Necessary Accessories on Page 40

MODEL	LENGTH	POWER	LIGHT OUTPUT	EFFICACY	CRI	PART NO. (3000 K)	PART NO. (3500 K)	PART NO. (4000 K)
ThinStick-LED	7 7/8"	2 W	190 Lm	95 lm/W	>94	TS/8/3000/M/D	TS/8/3500/M/D	TS/8/4000/M/D
ThinStick-LED	11 13/16"	3.4 W	320 Lm	94 lm/W	>94	TS/12/3000/M/D	TS/12/3500/M/D	TS/12/4000/M/D
ThinStick-LED	22 7/16"	7 W	650 Lm	93 lm/W	>94	TS/24/3000/M/D	TS/24/3500/M/D	TS/24/4000/M/D
ThinStick-LED	34 1/4"	9.6 W	910 Lm	95 lm/W	>94	TS/34/3000/M/D	TS/34/3500/M/D	TS/34/4000/M/D
ThinStick-LED	44 7/8"	13 W	1220 Lm	94 lm/W	>94	TS/46/3000/M/D	TS/46/3500/M/D	TS/46/4000/M/D

Compatible Drivers on Page 38

Dimensions

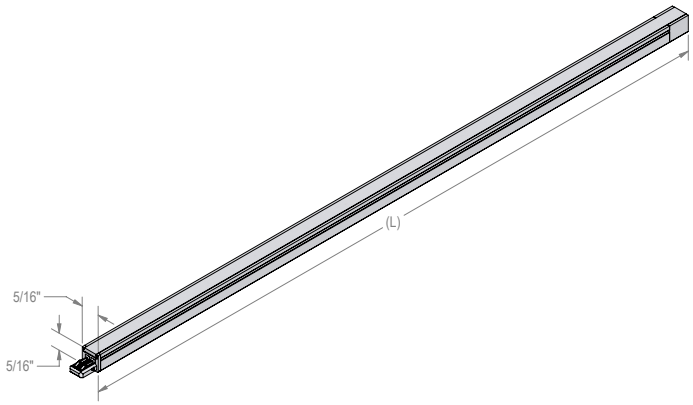

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #114)



Daisy Driver, 75W
(Full Specs on Page #115)



Daisy Driver, 96W
(Full Specs on Page #116)



Driver, 6W
(Full Specs on Page #117)

Compatibility

Constant Voltage Compatible LEDs

LINEAR
ThinStick-LED
ThinStick-LED HOT
FreeCut-LED
CStick-LED
TapeBasic-LED
TapeUltra-LED
TapeEven-LED
Tape90°-LED
TapeSideView-LED
Curve-LED
Neon-LED

Low Voltage Accessories

ThinStick-LED

Power Cords

FINISH	LENGTH	PART NO.
White	79"	TS/PC/79/WH/N

Connecting Cables

FINISH	LENGTH	PART NO.
White	2"	TS/CC/2/WH/N
White	12"	TS/CC/12/WH/N
White	39"	TS/CC/39/WH/N
Black	2"	TS/CC/2/BL/N
Black	12"	TS/CC/12/BL/N

Optional Accessories

DESCRIPTION	PART NO.
Dimming Module	PS24V/DIM/EURO
Dimming Controller	DIMCONTROL/EURO
Y-Cable adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPSDIM/V2
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/Y
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power cord locking clip	CLIP/24V/CCPC

ThinStick-LED HOT

Power Cords

FINISH	LENGTH	PART NO.
White	79"	TS/PC/79/WH/N/HT

Connecting Cables

FINISH	LENGTH	PART NO.
White	2"	TS/CC/2/WH/N/HT

Optional Accessories

DESCRIPTION	PART NO.
Y-Cable adapter	STICKDIM/YCABLE
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/Y
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Power cord locking clip	CLIP/24V/CCPC

Design and technical specifications may change without advance notice. Information is accurate at the time of publication.