


ThinStick-LED HOT

NEW

LOW VOLTAGE

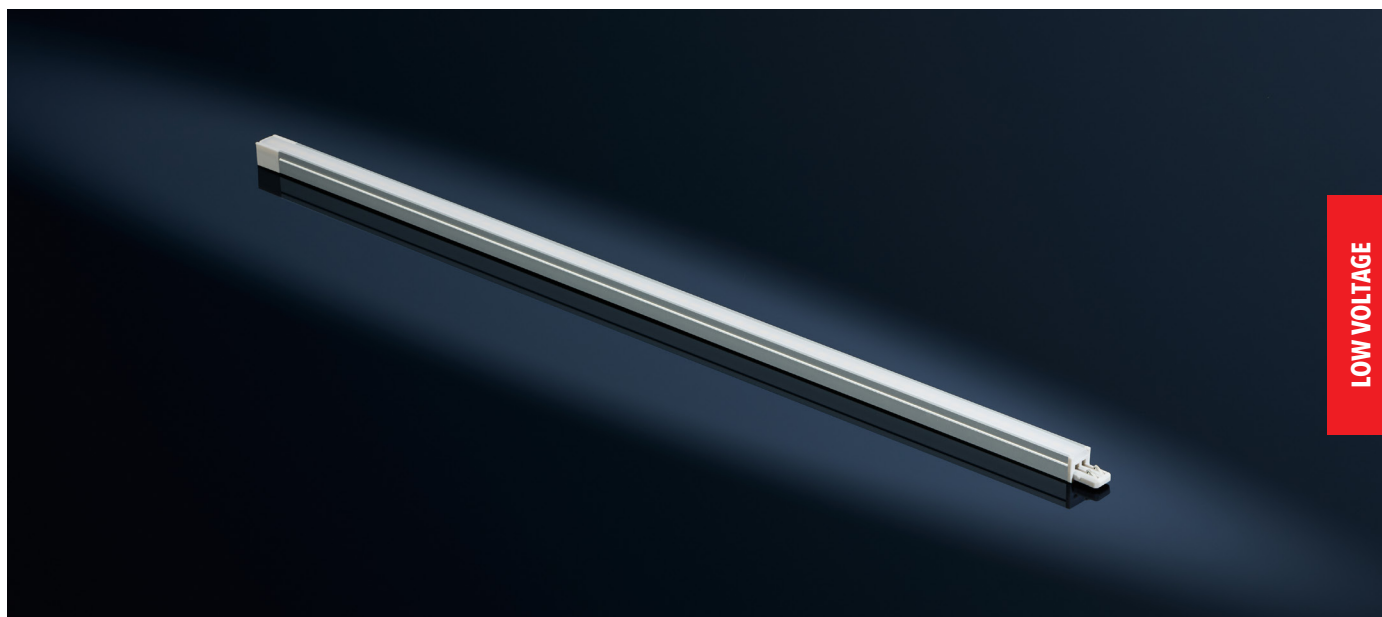

Product Description

The Next Evolution of the ThinStick-LED Family

The ThinStick-LED HOT is UL Listed and UL EPH Certified for use in HOT Food Zones making it ideal for supermarkets and hot foods cases. This latest addition to the Stick series offers surface-mounted options for furniture, displays, showcases and cabinets. The ThinStick-LED HOT promises to be a versatile and dependable fixture for the food service industry

Product Features

- Available sizes:
 - 8" (1.8 W)
 - 12" (2.7 W)
 - 24" (5.1 W)
 - 34" (7.8 W)
 - 46" (10.3 W)
- Available color temperatures:
 - 3000 K
 - 3500 K
 - 4000 K
 - Additional color temperatures (special order)
- Food safe up to 185° F.
- Upgraded Thermostability magnetics built-in
- Ambient temps -20° -85°C (-4°-185° F)
- Extremely small dimensions: 5/16" H x 5/16" W
- Interconnect up to 11.5 ft or 36 W in one run
- Individual runs, including cables not to exceed 18'
- Linear LED with frosted lens
- Can be recessed (flush with board) or surface-mounted
- Extremely high, even light output
- Comes with screw-in mounting clips
- To be used with 24 Vdc Constant Voltage Driver
- EPH certified to NSF/ANSI 2 for use in food zones
- 50,000 hours usable life
- Excellent CRI >94
- Efficacy >112 lm/W






Available Options

Necessary Accessories on Page 40

MODEL	LENGTH	POWER	LIGHT OUTPUT	EFFICACY	CRI	PART NO. (3000 K)	PART NO. (3500 K)	PART NO. (4000 K)
ThinStick-LED HOT	7 7/8"	1.8 W	200 Lm	112 lm/W	>94	TS/8/3000/M/N/HT	TS/8/3500/M/N/HT	TS/8/4000/M/N/HT
ThinStick-LED HOT	11 13/16"	2.7 W	340 Lm	126 lm/W	>94	TS/12/3000/M/N/HT	TS/12/3500/M/N/HT	TS/12/4000/M/N/HT
ThinStick-LED HOT	22 7/16"	5.13 W	700 Lm	136 lm/W	>94	TS/24/3000/M/N/HT	TS/24/3500/M/N/HT	TS/24/4000/M/N/HT
ThinStick-LED HOT	34 1/4"	7.83 W	960 Lm	122 lm/W	>94	TS/34/3000/M/N/HT	TS/34/3500/M/N/HT	TS/34/4000/M/N/HT
ThinStick-LED HOT	44 7/8"	10.26 W	1300 Lm	127 lm/W	>94	TS/46/3000/M/N/HT	TS/46/3500/M/N/HT	TS/46/4000/M/N/HT

Compatible Drivers on Page 38

Dimensions

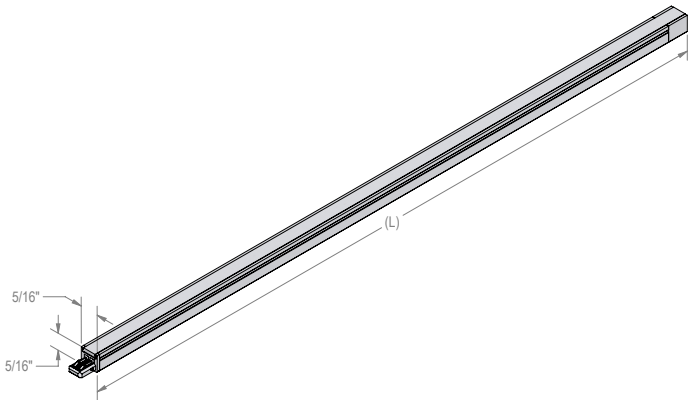

Low Voltage Drivers

Constant Voltage Drivers

24 Vdc Drivers



Daisy Driver, 30W
(Full Specs on Page #114)



Daisy Driver, 75W
(Full Specs on Page #115)



Daisy Driver, 96W
(Full Specs on Page #116)



Driver, 6W
(Full Specs on Page #117)

Compatibility

Constant Voltage Compatible LEDs

LINEAR

ThinStick-LED

ThinStick-LED HOT

FreeCut-LED

CStick-LED

TapeBasic-LED

TapeUltra-LED

TapeEven-LED

Tape90°-LED

TapeSideView-LED

Curve-LED

Neon-LED

Low Voltage Accessories

ThinStick-LED

Power Cords

FINISH	LENGTH	PART NO.
White	79"	TS/PC/79/WH/N

Connecting Cables

FINISH	LENGTH	PART NO.
White	2"	TS/CC/2/WH/N
White	12"	TS/CC/12/WH/N
White	39"	TS/CC/39/WH/N
Black	2"	TS/CC/2/BL/N
Black	12"	TS/CC/12/BL/N

Optional Accessories

DESCRIPTION	PART NO.
Dimming Module	PS24V/DIM/EURO
Dimming Controller	DIMCONTROL/EURO
Y-Cable adapter	STICKDIM/YCABLE
Remote Control Dimmer	RCPDIM/V2
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/Y
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Sensor Switch, Dimmable	IRSWITCH/H/D
Power cord locking clip	CLIP/24V/CCPC

ThinStick-LED HOT

Power Cords

FINISH	LENGTH	PART NO.
White	79"	TS/PC/79/WH/N/HT

Connecting Cables

FINISH	LENGTH	PART NO.
White	2"	TS/CC/2/WH/N/HT

Optional Accessories

DESCRIPTION	PART NO.
Y-Cable adapter	STICKDIM/YCABLE
Rocker Switch	PS24V/SWITCH/RS/H
Rocker Switch, DC plug	PS24V/SWITCH/RS/DC1224/H
Terminal Block	PS24V/TB
Terminal Block, DC plug	PS24V/TB/DC/Y
24 V Occupancy Switch	PS24V/SW/OC
Sensor Switch	IRSWITCH/H
Power cord locking clip	CLIP/24V/CCPC